

TR-260

DCF functional and performance Test Plan

Issue: 2
Issue Date: November 2012

Notice

The Broadband Forum is a non-profit corporation organized to create guidelines for broadband network system development and deployment. This Broadband Forum Technical Report has been approved by members of the Forum. This Broadband Forum Technical Report is not binding on the Broadband Forum, any of its members, or any developer or service provider. This Broadband Forum Technical Report is subject to change, but only with approval of members of the Forum. This Technical Report is copyrighted by the Broadband Forum, and all rights are reserved. Portions of this Technical Report may be copyrighted by Broadband Forum members.

This Broadband Forum Technical Report is provided AS IS, WITH ALL FAULTS. ANY PERSON HOLDING A COPYRIGHT IN THIS BROADBAND FORUM TECHNICAL REPORT, OR ANY PORTION THEREOF, DISCLAIMS TO THE FULLEST EXTENT PERMITTED BY LAW ANY REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTY:

- (A) OF ACCURACY, COMPLETENESS, MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR TITLE;
- (B) THAT THE CONTENTS OF THIS BROADBAND FORUM TECHNICAL REPORT ARE SUITABLE FOR ANY PURPOSE, EVEN IF THAT PURPOSE IS KNOWN TO THE COPYRIGHT HOLDER;
- (C) THAT THE IMPLEMENTATION OF THE CONTENTS OF THE TECHNICAL REPORT WILL NOT INFRINGE ANY THIRD PARTY PATENTS, COPYRIGHTS, TRADEMARKS OR OTHER RIGHTS.

By using this Broadband Forum Technical Report, users acknowledge that implementation may require licenses to patents. The Broadband Forum encourages but does not require its members to identify such patents. For a list of declarations made by Broadband Forum member companies, please see <http://www.broadband-forum.org>. No assurance is given that licenses to patents necessary to implement this Technical Report will be available for license at all or on reasonable and non-discriminatory terms.

ANY PERSON HOLDING A COPYRIGHT IN THIS BROADBAND FORUM TECHNICAL REPORT, OR ANY PORTION THEREOF, DISCLAIMS TO THE FULLEST EXTENT PERMITTED BY LAW (A) ANY LIABILITY (INCLUDING DIRECT, INDIRECT, SPECIAL, OR CONSEQUENTIAL DAMAGES UNDER ANY LEGAL THEORY) ARISING FROM OR RELATED TO THE USE OF OR RELIANCE UPON THIS TECHNICAL REPORT; AND (B) ANY OBLIGATION TO UPDATE OR CORRECT THIS TECHNICAL REPORT.

Broadband Forum Technical Reports may be copied, downloaded, stored on a server or otherwise re-distributed in their entirety only, and may not be modified without the advance written permission of the Broadband Forum.

The text of this notice must be included in all copies of this Broadband Forum Technical Report.

Issue History

Issue Number	Approval Date	Publication Date	Issue Editor	Changes
1	November 2011		Christopher Croot, BT	Original
2	26 November 2012	14 January 2013	Christopher Croot, BT	Additional DCF tests

Comments or questions about this Broadband Forum Technical Report should be directed to info@broadband-forum.org.

Editor	Christopher Croot	BT
Operations & Network Management WG Chair	Peter Adams	ADTRAN
Vice-Chair	Moti Morgenstern	ECI
Chief Editor	Michael Hanrahan	Huawei Technologies

TABLE OF CONTENTS

EXECUTIVE SUMMARY 7

1 PURPOSE AND SCOPE..... 8

 1.1 PURPOSE 8

 1.2 SCOPE 8

2 REFERENCES AND TERMINOLOGY..... 9

 2.1 CONVENTIONS 9

 2.2 REFERENCES 9

 2.3 ABBREVIATIONS 10

3 TECHNICAL REPORT IMPACT 11

 3.1 ENERGY EFFICIENCY..... 11

 3.2 IPV6..... 11

 3.3 SECURITY..... 11

 3.4 PRIVACY 11

4 DCF TESTING ENVIRONMENT..... 12

 4.1 TEST CONFIGURATIONS FOR DCF FUNCTIONAL TESTS 12

 4.2 TEST CONFIGURATIONS FOR DCF PERFORMANCE TESTS 15

 4.3 CONFIGURATIONS OF DSL LINES 17

 4.4 DEFINITION OF COLLECTION TASKS..... 17

 4.4.1 *Collection Tasks for functional tests*..... 17

 4.4.2 *Collection Tasks for Maximum load tests*..... 19

 4.4.3 *Collection Tasks for performance tests*..... 22

5 DCF FUNCTIONAL TESTS..... 24

 5.1 TASK CONFIGURATION AND MANAGEMENT TESTS 24

 5.1.1 *Create_collection_task test*..... 24

 5.1.2 *Modify CollectionTask test* 25

 5.1.3 *Retrieve_collection_tasks test*..... 27

 5.1.4 *Retrieve_all_collection_tasks test*..... 27

 5.1.5 *Retrieve_all_active_collection_tasks*..... 28

 5.2 DATA COLLECTION TESTS 28

 5.2.1 *Start_collection_task test*..... 28

 5.2.2 *Push_upload test*..... 29

 5.2.3 *Pull-upload test*..... 31

 5.2.4 *Collection_filter test*..... 32

 5.2.5 *Report_delete test*..... 33

 5.2.6 *Data validity test*..... 34

 5.2.7 *Stop_collection_task test*..... 35

 5.2.8 *Task duration test*..... 36

5.2.9 *Delete_collection_task test* 36

6 DCF SOUTHBOUND INTERFACE TESTS..... 37

6.1 DATA COLLECTION TESTS 38

6.1.1 *Push_upload test*..... 38

6.1.2 *Data validity test*..... 39

6.1.1 *Stop collection task test*..... 41

6.1.2 *Task duration test*..... 42

7 DCF PERFORMANCE TESTS 43

7.1 PERFORMANCE TESTS UNDER REFERENCE COMBINED USE CASE..... 43

8 DCF LOAD STRESS TESTS [OPTIONAL] 46

8.1 MAX PARAMETER FOR EVERY LINE IN A COLLECTION TASK TEST [OPTIONAL] 46

8.2 MAX LINES PER BOARD COLLECTION TASK TEST [OPTIONAL] 46

8.3 MAX LINES FOR COLLECTION TASK TEST [OPTIONAL]..... 47

9 DCF SOUTHBOUND INTERFACE LOAD STRESS TESTS [OPTIONAL] 48

9.1 SOUTHBOUND INTERFACE MAX PARAMETER FOR EVERY LINE IN A COLLECTION TASK TEST [OPTIONAL] 48

9.2 SOUTHBOUND INTERFACE MAX LINES PER BOARD COLLECTION TASK TEST [OPTIONAL] 49

9.3 SOUTHBOUND INTERFACE MAX LINES FOR COLLECTION TASK TEST [OPTIONAL] 50

List of Figures

Figure 1 – Test Configuration for functional tests - Distributed DCF in NE 12

Figure 2 – Test Configuration for functional tests - Distributed DCF external, connected to a single NE..... 13

Figure 3 – Test Configuration for functional tests - Distributed DCF external, connected to multiple NEs 13

Figure 4 - Test Configuration for functional tests on Southbound interface (Northbound interface externally accessible)..... 14

Figure 5 - Test Configuration for functional tests on Southbound interface (Northbound interface not externally accessible)..... 14

Figure 6 – Test Configuration for performance tests - Distributed DCF in the NE 15

Figure 7 – Test Configuration for performance tests - Distributed DCF external to NE 16

Figure 8 – Test Configuration for performance tests - Distributed DCF external to multiple NEs 16

List of Tables

Table 1 - Changing parameters of Collection Task 2 26

Table 2 - Changing parameters of Collection Task 3 27

Executive Summary

TR-198[4] “*DQS: DQM systems functional architecture and requirements*” defines requirements for DQM-ready systems. More specifically, the Data Collection Function (DCF) with related interfaces is well defined in TR-198 and it is of importance for operators who wish to improve their DQM strategies by introducing this advanced collection capability in their networks.

TR-260 specifies functional and performance tests for the DCF and is aimed to help the verification and maturing of DCF implementations.

Updates for Issue 2 include:

Issue 2 defines additional DCF Southbound interface tests in order to verify the performance and functionality of the interface between the DCF and the DQM-ME in case the NBI tests fail.

1 Purpose and Scope

1.1 Purpose

The purpose of TR-260 is to specify functional and performance tests and appropriate test setups for verifying DCF implementations against the relevant requirements specified in TR-198 [4].

1.2 Scope

TR-260 applies to Data Collection Function implementations described in Appendix C/TR-198. These tests are also used to test the DCF Southbound interface. Additional Southbound interface tests are also defined to verify the performance and functionality of the interface between the DCF and the DQM-ME in case the NBI tests fails.

The functional and performance tests of this Test Plan are mainly focused on the DCF Northbound interface primitives (i.e. the G interface in TR-198) as defined in Section 6.3.1/TR-198. Other general aspects and data attributes are also tested such as data presentation and validity. TR-260, like TR-198, is focused on DSL technologies that are currently addressed by ITU-T G.997.1 [7].

2 References and Terminology

2.1 Conventions

In this Technical Report, several words are used to signify the requirements of the specification. These words are always capitalized. More information can be found in RFC 2119 [5].

MUST	This word, or the term “REQUIRED”, means that the definition is an absolute requirement of the specification.
MUST NOT	This phrase means that the definition is an absolute prohibition of the specification.
SHOULD	This word, or the term “RECOMMENDED”, means that there may exist valid reasons in particular circumstances to ignore this item, but the full implications must be understood and carefully weighed before choosing a different course.
SHOULD NOT	This phrase, or the phrase "NOT RECOMMENDED" means that there may exist valid reasons in particular circumstances when the particular behavior is acceptable or even useful, but the full implications should be understood and the case carefully weighed before implementing any behavior described with this label.
MAY	This word, or the term “OPTIONAL”, means that this item is one of an allowed set of alternatives. An implementation that does not include this option MUST be prepared to inter-operate with another implementation that does include the option.

2.2 References

The following references are of relevance to this Technical Report. At the time of publication, the editions indicated were valid. All references are subject to revision; users of this Technical Report are therefore encouraged to investigate the possibility of applying the most recent edition of the references listed below.

A list of currently valid Broadband Forum Technical Reports is published at www.broadband-forum.org.

Document	Title	Source	Year
[1] TR-067 Issue 2	<i>ADSL Interoperability Test Plan Issue 2</i>	BBF	2006
[2] TR-100	<i>ADSL2/ADSL2plus Performance Test Plan</i>	BBF	2007
[3] TR-114	<i>VDSL2 Performance Test Plan</i>	BBF	2010
[4] TR-198	<i>DQS: DQM systems functional architecture and</i>	BBF	2012

	Issue 2	<i>requirements</i>		
[5]	RFC 2119	<i>Key words for use in RFCs to Indicate Requirement Levels</i>	IETF	1997
[6]	G.996.2	<i>Single-ended line testing for digital subscriber lines (DSL)</i>	ITU	2009
[7]	G.997.1	<i>Physical layer management for digital subscriber line (DSL) transceivers</i>	ITU	2009

2.3 Abbreviations

This Technical Report uses the following abbreviations:

CPE	Customer Premise Equipment
DCF	Data Collection Function
DQM	DSL Quality Management
EM	Element Manager
ME	Management Entity
MIB	Management Information Base
NE	Network Element
SUT	System Under Test
TR	Technical Report
WG	Working Group
WT	Working Text

3 Technical Report Impact

3.1 Energy Efficiency

The scope of TR-260 does not specifically cover improvements in energy efficiency, the tests described within are meant to support DQM algorithms and techniques some of which could enable improvements in energy efficiency.

3.2 IPv6

TR-260 has no impact on IPv6.

3.3 Security

The interfaces being tested in TR-260 will need to be secured against abuse using appropriate security practices.

3.4 Privacy

TR-260 has no impact on privacy.

4 DCF Testing Environment

This section specifies the testing environment for both functional and performance tests. It contains all the test configurations and settings for the System Under Test (SUT). Collection tasks are also specified.

In the functional tests, all the DCF functionalities are tested in a basic setup, to verify the compliance with the requirements on primitives and related behaviours.

In the performance tests the DCF is tested in a loaded setup, to verify that the required performance capabilities of data collection are met.

4.1 Test configurations for DCF functional tests

The general test configuration for functional tests encompasses a Network Element (NE) configured with at least two active DSL lines connected to two CPE modems. The DCF is connected to a logical management entity, from now on indicated as the DCF manager, which shall be able to manage it via the DCF Northbound interface primitives specified in TR-198 [4]. The DCF Manager may be implemented as an external system connected to the DCF via a physical interface (see Figure 1, Figure 2, Figure 3 and Figure 4) or it may be integrated with the DCF itself, hence the Northbound interface may not be externally accessible (see Figure 5). Even in this situation, the DCF shall be configurable to collect data from the NE(s) with the TR-198 “collection task logic”, while the actual way to configure the DCF is implementation dependent.

For the tests specified in this Technical Report the DCF manager, intended as a logical entity, either external to or integrated with the DCF, will also be referred to as the entity the DCF sends data reports to. Again, in case the Northbound interface is not directly accessible, the collected data reports shall be available to other logical entities via, a GUI, recorded in a file or other ways, depending on the implementation.

If the DCF manager and the DCF are implemented in two separate entities, the interconnection between them shall be realised via an in-band management channel in order to take into account the constraints of this type of channel. A loop simulator and a noise generator shall be connected randomly to one of the lines involved in the test to be able to cause a variation of values for the line parameters and, in turn, affect the data collected.

The setup for a Distributed DCF integrated in the NE is shown in Figure 1.

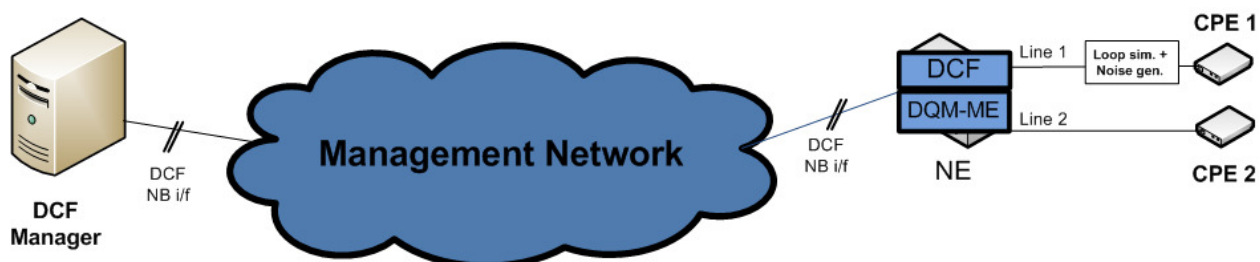


Figure 1 – Test Configuration for functional tests - Distributed DCF in NE

The setup for a Distributed DCF external to the NE is shown in Figure 2 (single NE case) and Figure 3 (multiple NE case).

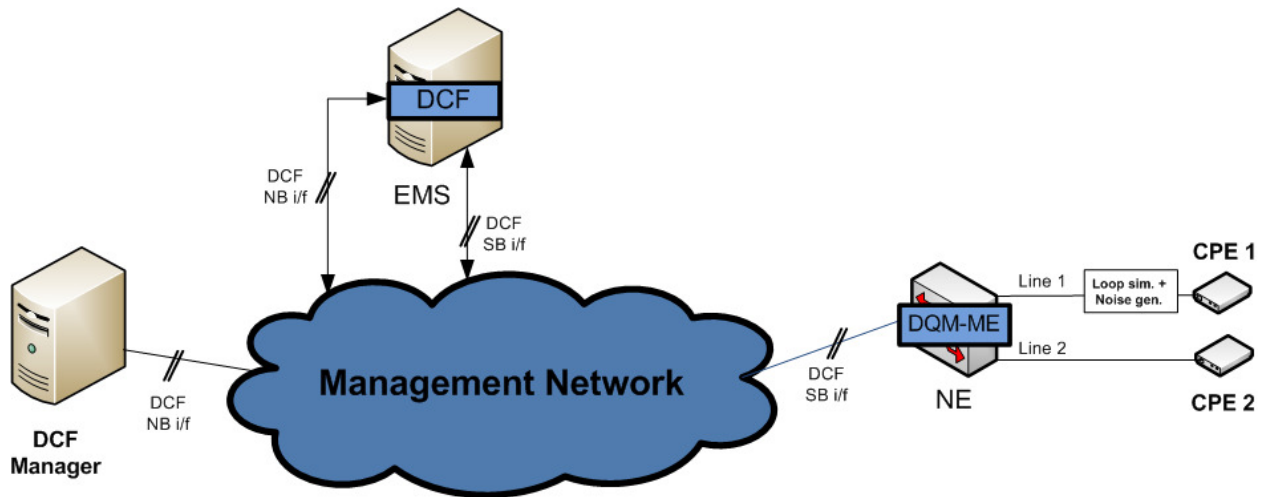


Figure 2 – Test Configuration for functional tests - Distributed DCF external, connected to a single NE

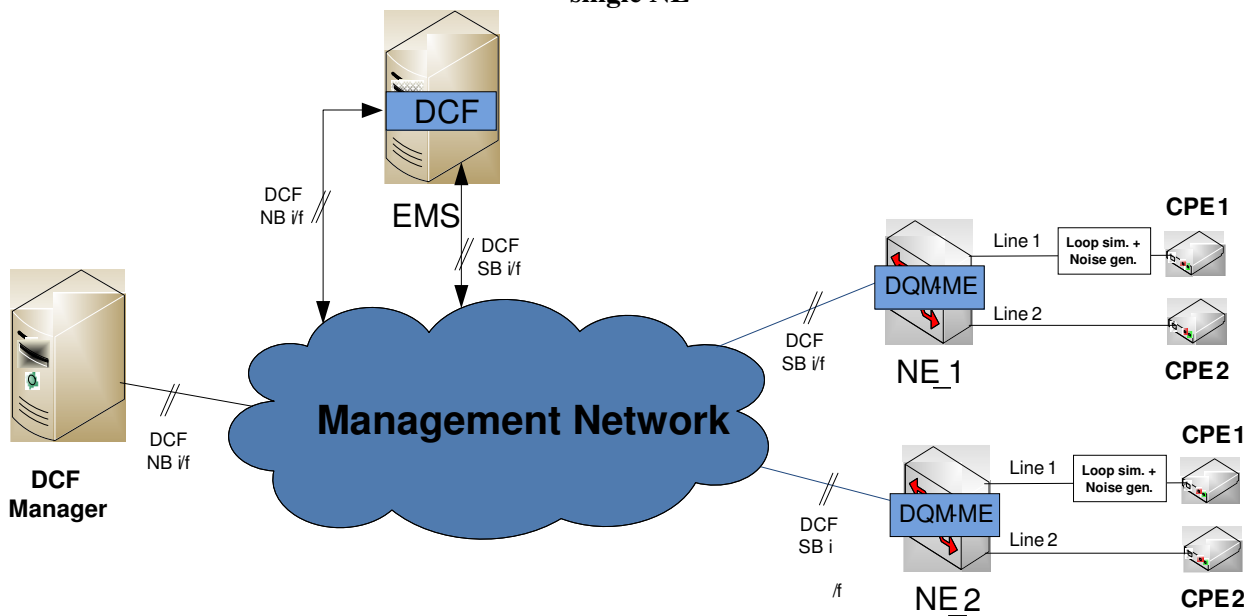


Figure 3 – Test Configuration for functional tests - Distributed DCF external, connected to multiple NEs

Figure 4 and Figure 5 show the setups to test the Southbound interface via the introduction of a Protocol Analyser at the DCF Southbound interface (see details in Section 0).

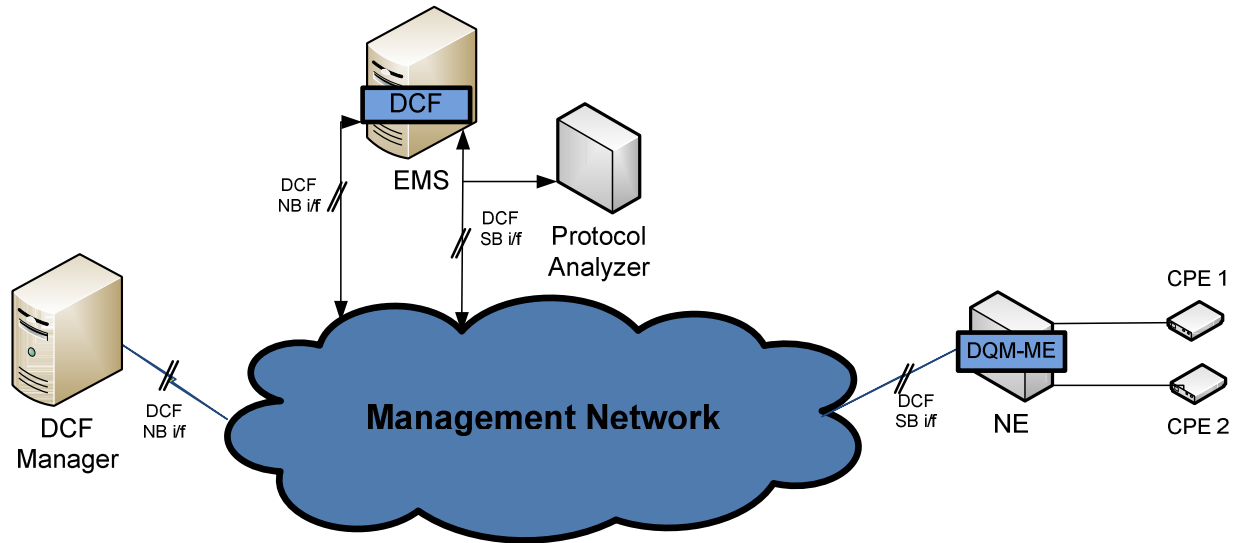


Figure 4 - Test Configuration for functional tests on Southbound interface (Northbound interface externally accessible)

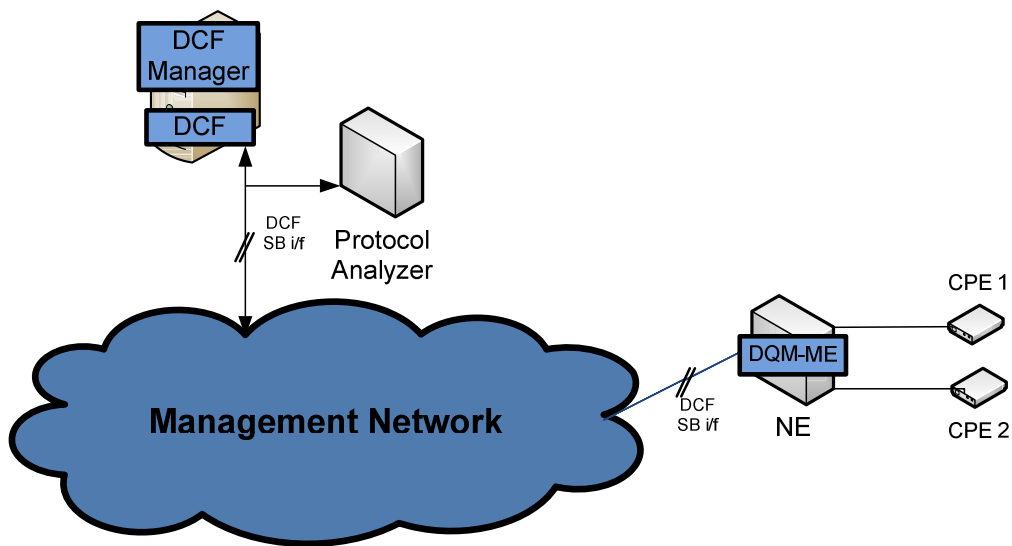


Figure 5 - Test Configuration for functional tests on Southbound interface (Northbound interface not externally accessible)

4.2 Test configurations for DCF performance tests

All general considerations reported in the first paragraph of Section 4.1 apply. The main difference in the setup for performance tests is that a high number of lines have to be configured and active to create a load in the collection of data. The NE (or possibly the NEs) involved in the tests **MUST** be fully equipped.

To practically achieve this configuration without the need of a huge number of CPE modems, the lines **MUST** be configured to stay in L0 mode even if the modem is disconnected¹.

The following procedure can be used to activate a high number of NE lines:

1. a block of lines (e.g. all the lines of a linecard) is configured and the connected modems activated;
2. after the handshake, a showtime freeze command is sent to these lines;
3. the modems are disconnected;
4. repeat the steps above until all the NE lines are active;
5. for the last block, the modems can be left connected.

It may well be that the same effect of a high number of lines loading the DCF with data can be obtained in two other ways:

- a. “freezing”, via a special command, the MIB content of the lines once they have reached showtime;
- b. provisioning the lines as logical entities hence creating the associated instance in the NE’s MIB tree with all parameters collectable, regardless of their actual value. In the latter case the lines would not even need to be synchronized but then the Collection Tasks specified in Section 4.4.3 shall be configured without any “collection filter”.

Nevertheless the actual ability to load the data collection via options a or b above needs to be proved upfront.

The figures below show the test configuration assuming a limited number of modems are connected to the NE, while all the other lines are kept in L0 state.

The setup for a Distributed DCF integrated in the NE is shown in Figure 6.



Figure 6 – Test Configuration for performance tests - Distributed DCF in the NE

¹ This setting is often referred to as “showtime freeze” or “always connected”.

The setup for a Distributed DCF external to the NE is shown in Figure 7.

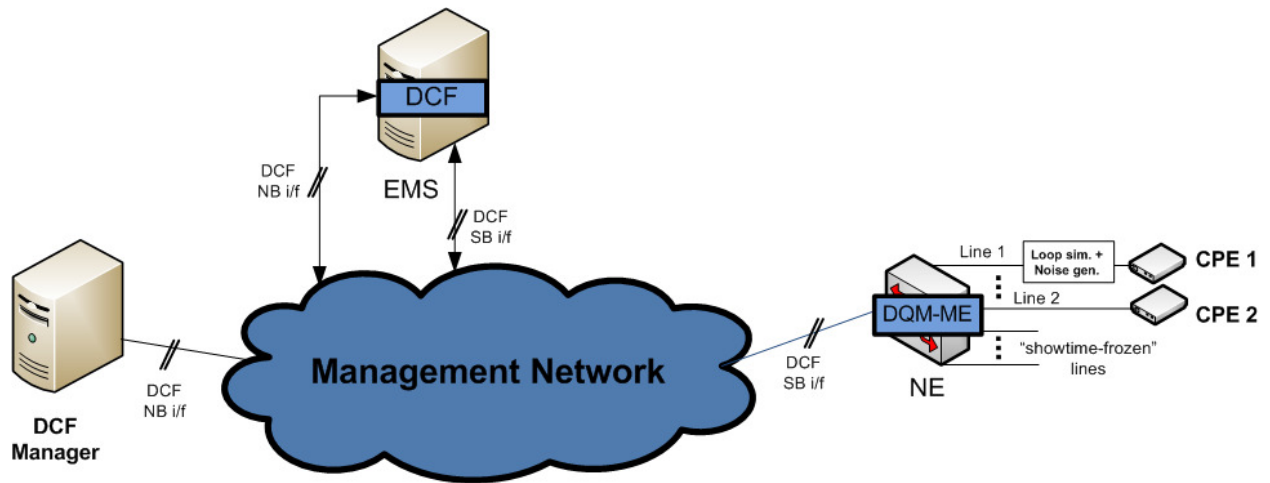


Figure 7 – Test Configuration for performance tests - Distributed DCF external to NE

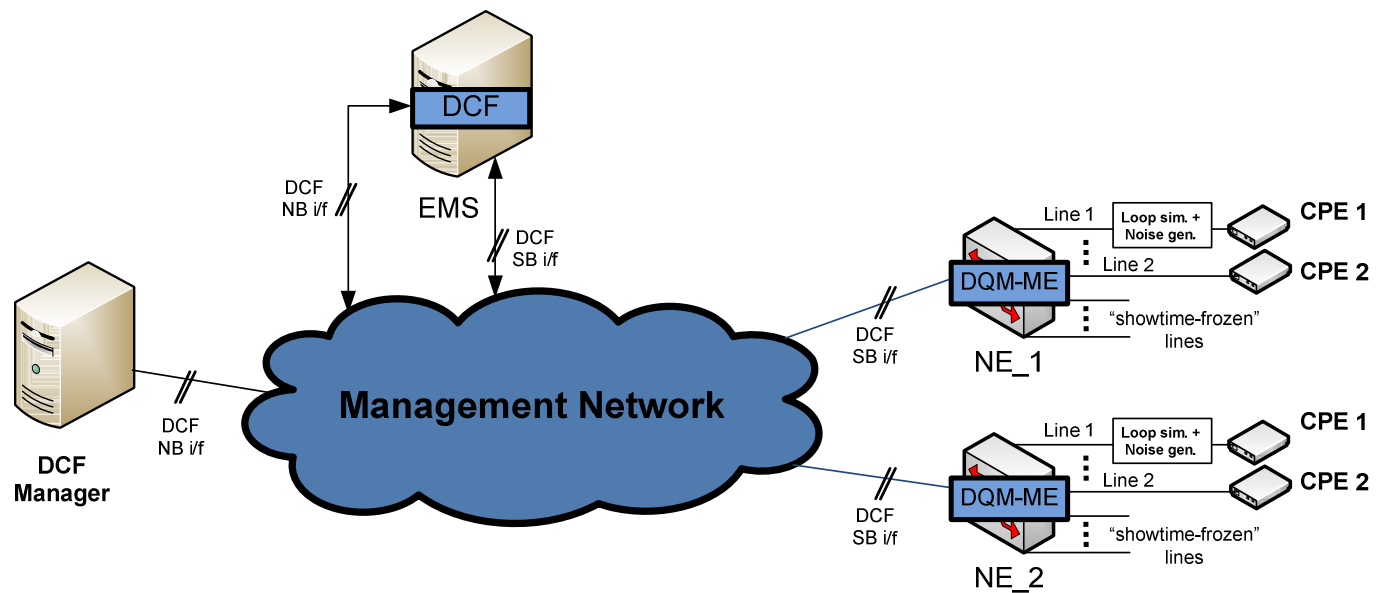


Figure 8 – Test Configuration for performance tests - Distributed DCF external to multiple NEs

The setup for a Centralised DCF is for further study.

4.3 Configurations of DSL lines

The configuration of the DSL lines is not specifically relevant for the execution of the tests specified in this Test Plan. Furthermore these tests are applicable to any type of DSL (e.g. VDSL2, ADSL2plus, ADSL). As such the number of parameters and collectable data associated to different DSL modes of operation varies.

In the remainder of this document it is assumed that:

- a) Line 1 belongs to a VDSL2 linecard and is configured with line configuration profile combinations as defined in TR-114 [3];
- b) Line 2 belongs to a ADSL2/2plus linecard and is configured with a specific test profile as defined in TR-100 [2].

For the Push_upload test (see Section 5.2.2) and (see Section 5.2.6), correct data collection is verified twice, first when Line 2 belongs to an ADSL2/2plus line card and configured as above and secondly when:

- c) Line 2 belongs to an ADSL linecard and it is configured as per one of the settings defined in TR-067 [1].

4.4 Definition of Collection Tasks

This Section specifies the configurations of different CollectionTasks on the DCF as deemed necessary to perform the Test Cases specified in this Test Plan.

The Task Information fields are those in Table 10/TR-198[4] for the Create_collection_task.request primitive. Each Task Information field is specified in Table 11/TR-198.

For sake of simplicity, lines are indicated by a single number. In actual implementations an unambiguous notation shall refer to a line in the context of a network hierarchy: {NE_ID, Line_ID} where Line_ID is, for example, defined by rack, shelf, slot, port number.

4.4.1 Collection Tasks for functional tests

Collection Task 2

This collection task, once activated, collects scalar and framing parameters from Line 2 every 15 minutes for 6 hours and then stops.

Data is not collected from a line that is in a “defect” status. Defect is defined in Section 3.5/G.997.1[7].

Task Information Fields	Value
task_name	CollectionTask2
resource_list	Line: 2
{parameter_list,collection_frequency,upload_frequency}	[scalar parameters,15min,30min]

	[framing parameters,15min,30min]
collection_filter	Line: 2 (xdsl2LineStatusXtuc = 'noDefect')
task_duration	6h
priority_request_flag (if supported)	-

Collection Task 3

This collection task, once activated, collects performance, vectorial, status and xTU information parameters from Lines 1 and 2 every 15 minutes for 24 hour and then stops.

Data is not collected from a line that is in a “defect” status.

Task Information Fields	Value
task_name	CollectionTask3
resource_list {parameter_list,collection_frequency,upload_frequency}	Line: 1, 2 [performance monitoring parameters,15min,15min] [vectorial parameters,15min,1h] [status parameters,15min,15m] [xTU information parameters,15min,15min]
collection_filter	Line: 1, 2 (xdsl2LineStatusXtuc = 'noDefect')
task_duration	24h
priority_request_flag (if supported)	-

Collection Task Multi_NE

This collection task, once activated, collects performance, vectorial, status and xTU information parameters from Lines 1 and 2 of Network Elements NE_1 and NE_2 (see Figure 8) every 15 minutes for 24 hours and then stops.

Data is not collected from a line that is in a “defect” status.

Task Information Fields	Value
task_name	CollectionTask_Multi_NE
resource_list {parameter_list,collection_frequency,upload_frequency}	NE: NE_1, NE_2 {Line: 1, 2 [performance monitoring parameters,15min,15min] [vectorial parameters,15min,1h] [status parameters,15min,15min] [xTU information parameters,15min,15min] }
collection_filter	Line: 1, 2 (xds12LineStatusXtuc = 'noDefect')
task_duration	24h
Priority_request_flag (if supported)	-

4.4.2 Collection Tasks for Maximum load tests

These tasks and the tests specified in Section 8 and 9 are useful for an investigation of the maximum DCF load if the performance tests specified in Section 7 and 8 are not met. These tests may be especially useful where the DCF is not integrated in the NE and data gathered via SNMP which may introduce bottlenecks at different levels (e.g. max parameters per line, max lines per linecard or max lines per NE). This investigation is beyond the actual verification of TR-198 [4] compliance and it is included only as an aid to correctly test the DCF implementation.

CollectionTask-MaxParams

This collection task is useful to verify the capability of a DCF to collect all parameters required in TR-198 on a single xDSL line on the NE. The collection frequency (and associated period T_{coll}) depends on the parameter group and the duration is 1 day.

Data is not collected from a line that is in a “defect” status.

Task Information Fields	Value
task_name	Max_Params_Single_Line
resource_list {parameter_list,collection_frequency,upload_frequency}	Line: 1 line on the NE (e.g. line 1 on the board 1) [scalar parameters, 15min, 15min] [framing parameters, 24h, 24h] [performance monitoring parameters,

	<p>15min,15min]</p> <p>[vectorial parameters, 15min, 15min]</p> <p>[status parameters, 15min,15min]</p> <p>[xTU information parameters, 24h, 24h]</p> <p>[Vector of Profiles parameters, 15min,15min]</p> <p>[Threshold crossing notifications, 15min,15min]</p>
collection_filter	<p>Line: 1 line on the NE (e.g. line 1 on the board 1)</p> <p>(xdsl2LineStatusXtuc = 'noDefect')</p>
task_duration	24h
priority_request_flag (if supported)	-

CollectionTask-MaxLinesPerLinecard

This collection task is useful to verify the capability of a DCF to collect all parameters required in TR-198 [4] over the maximum number of xDSL lines on a single line card as declared by the manufacturer. This test stresses the board performance to verify the ability of the on-board hardware/software to manage the data collection load. The collection frequency (and associated period T_{coll}) depends on the parameter group and the duration is 1 day.

Data is not collected from a line that is in a “defect” status.

Task Information Fields	Value
task_name	Max_Lines_Per_Linecard
resource_list {parameter_list,collection_frequency,upload_frequency}	<p>Line: the declared maximum number (k) of lines of a line card on the NE (e.g. lines 1 to k on the board 1)</p> <p>[scalar parameters, 15min, 15min]</p> <p>[framing parameters, 24h, 24h]</p> <p>[performance monitoring parameters, 15min,15min]</p> <p>[vectorial parameters, 15min, 15min]</p> <p>[status parameters, 15min,15min]</p> <p>[xTU information parameters, 24h, 24h]</p> <p>[Vector of Profiles parameters,</p>

	15min,15min] [Threshold crossing notifications, 15min,15min]
collection_filter	Line: the declared maximum number (k) of lines of a line card on the NE (e.g. lines 1 to k on the board 1) (xDSL2LineStatusXtuc = 'noDefect')
task_duration	24h
priority_request_flag (if supported)	-

CollectionTask-MaxLinesPerNE

This collection task is useful to verify the capability of a DCF to collect all parameters required in TR-198 [4] over the maximum number of xDSL lines on the NE as declared by the manufacturer. The collection frequency (and associated period T_{coll}) depends on the parameter group and the duration is 1 day.

Data is not collected from a line that is in a “defect” status.

Task Information Fields	Value
task_name	Max_Lines_Per_NE
resource_list {parameter_list,collection_frequency,upload_frequency}	Line: the declared maximum number (m) of lines on the NE (e.g. lines 1 to k on n boards so that $k*n=m$) [scalar parameters, 15min, 15min] [framing parameters, 24h, 24h] [performance monitoring parameters, 15min,15min] [vectorial parameters, 15min, 15min] [status parameters, 15min,15min] [xTU information parameters, 24h, 24h] [Vector of Profiles parameters, 15min,15min] [Threshold crossing notifications, 15min,15min]
collection_filter	Line: the declared maximum number (m) of lines on the NE (e.g. lines 1 to k on n boards so that $k*n=m$)

	(xds12LineStatusXtuc = 'noDefect')
task_duration	24h
priority_request_flag (if supported)	-

4.4.3 Collection Tasks for performance tests

Collection Task Ref_Perf_BckGnd_Task_TR-198

This collection task is taken from Table 13/TR-198 [4] and represents the multi-line background collection activities of the combined collection task defined in TR-198 as a reference for the DCF performance requirements. Once activated, this collection task collects all parameters from all the active lines of the NE. The collection frequency (and associated period T_{coll}) depends on the parameter group and the duration is 2 days.

Data is not collected from a line that is in a “defect” status.

Note: DCF performance requirements in TR-198 allow, for the reference combined collection task in Table 13, $T_{upload} = [1 \text{ to } 4] * T_{coll}$. In this Test Plan, for the performance tests: $T_{upload} = T_{coll}$.

Task Information Fields	Value
task_name	Ref_Perf_BckGnd_Task_TR-198
resource_list {parameter_list,collection_frequency,upload_frequency}	Line: all the lines of the NE (Note) [scalar parameters,15min, 15min] [framing parameters, 24h, 24h] [performance monitoring parameters,15min,15min] [vectorial parameters,6h, 6h] [status parameters,15min,15min] [xTU information parameters, 24h, 24h] [Vector of Profiles parameters,15min,15min] [Threshold crossing notifications,15min,15min]
collection_filter	Line: all the lines of the NE (xds12LineStatusXtuc = 'noDefect')
task_duration	48h
priority_request_flag (if supported)	-

Note: as indicated in Table 14 of TR-198, if the DCF is implemented outside the NE and SNMP is used to collect the data, the actual number of lines for this Collection task shall be: **min(all NE lines, 100)**

Collection Task Ref_Perf_Task-k_TR-198

This collection task is taken from Table 13/TR-198 [4] and represents the collection activities on a single line of the combined collection task defined in TR-198 as a reference for the DCF performance requirements. Once activated, this collection task collects all parameters from line “k”. The collection frequency (and associated period T_{coll}) depends on the parameter group and the duration is 24 hours.

Data is not collected from a line that is in a “defect” status. Assignment of the actual value of “k” is done during the related test.

Note: TR-198 allows, for the reference combined collection task in Table 13/TR-198, that $T_{upload} = [1 \text{ to } 4] * T_{coll}$.

Task Information Fields	Value
task_name	Ref_Perf_Task-k_TR-198
resource_list {parameter_list,collection_frequency,upload_frequency}	Line: k (this is a dummy value) [scalar parameters,15min, 15min] [framing parameters, 24h, 24h] [performance monitoring parameters,15min,15min] [vectorial parameters, 15min,15min] [status parameters,15min,15min] [xTU information parameters, 24h, 24h] [Vector of Profiles parameters,15min,15min] [Threshold crossing notifications,15min,15min]
collection_filter	Line: k (this is a dummy value) (xds12LineStatusXtuc = ‘noDefect’)
task_duration	24h
priority_request_flag (if supported)	-

5 DCF functional tests

This Section specifies Test Cases related to the verification of the availability and correct implementation of DCF functionalities, namely Task configuration and reporting and Data Collection. The syntax for the list of parameters to be collected is based on the parameter groups and names reported in Section 6.1/ TR-198 [4].

The order of the Test Cases below is such that the verification of functional aspects relies on the SUT configuration and status as left by the execution of preceding Test Cases (e.g. Task creation and activation tests first, then data upload ones and then Task deletion verifications).

This way of following the Test Case numbering allows us to perform a series of functional tests in the most efficient way. On the other hand for stand-alone execution of one specific Test Case the test engineer may need, as a propaedeutic activity, to perform the configuration steps described in the Test Procedure of some of the preceding Test Cases.

5.1 Task Configuration and Management tests

These tests aim to verify the configurability and correct functional behaviour of the DCF via the “G” interface as per the requirements specified in Section 6.3/TR-198 [4].

5.1.1 Create_collection_task test

Covered TR-198 requirements: R-22, , R-23, R-63 to 67

Test Configuration	Refer to Figure 1 if the DCF is integrated in the NE or Figure 2 if not. Line 1 and 2 configured as per Section 4.3, points a) and b) respectively.
Test Procedure	6. Create Collection Task 2 on the DCF via the DCF manager. 7. Create Collection Task 3 on the DCF via the DCF manager.
Expected Result	<ol style="list-style-type: none"> 1. The configurable Task Information Fields MUST be as those specified in Table 10/TR-198 for the <i>Create_collection_task.request</i> primitive. 2. The syntax and semantic of Information field MUST be as specified in Table 11/TR-198 and R-63 to 67of TR-198, especially as far as mandatorily supported values are concerned. 3. The Collection Tasks MUST be created on the DCF and a <i>Create_collection_task.confirm</i> message shall be relayed on the DCF manager with following information: <ul style="list-style-type: none"> ▪ task_ID ▪ task_status; the value of this parameter MUST be <i>inactive</i> ▪ errorcode <p>Note: reporting of the errorcode is OPTIONAL in this case as no error is expected.</p>

The following test is only applicable to a DCF external, connected to multiple NEs.

Covered TR-198 requirements: R-22, R-23, R-63 to 67

Test Configuration	Refer to Figure 3 Line 1 and 2 configured as per Section 4.3, points a) and b) respectively.
Test Procedure	1. Create Collection Task Multi_NE on the DCF via the DCF manager.
Expected Result	<ol style="list-style-type: none"> 1. The configurable Task Information Fields MUST be as those specified in Table 10/TR-198 [4] for the <i>Create_collection_task.request</i> primitive. 2. The syntax and semantic of Information field MUST be as specified in Table 11/TR-198 and R-63 to 67 of TR-198, especially as far as mandatorily supported values are concerned. 3. Collection Task Multi_NE MUST be created on the DCF and a <i>Create_collection_task.confirm</i> message MUST be relayed on the DCF manager with following information: <ul style="list-style-type: none"> ▪ task_ID ▪ task_status; the value of this parameter MUST be <i>inactive</i> ▪ errorcode <p>Note: the report of the errorcode is OPTIONAL in this case as no error is expected.</p>

5.1.2 Modify CollectionTask test

Covered TR-198 [4] requirements: R-22, R-24, R-25, R-63 to 67

Test Configuration	Refer to Figure 1 if the DCF is integrated in the NE or Figure 2 if not. Line 1 and 2 configured as per Section 4.3, points a) and b) respectively. Collection Task 2 shall be “active”, while Collection Task 3 MUST be “inactive”
Test Procedure	<ol style="list-style-type: none"> 8. Modify Collection Task 2 on the DCF via the DCF manager, changing the upload frequency of the vectorial parameters and the task duration as in Table 1 9. Modify Collection Task 3 on the DCF via the DCF manager, changing the upload frequency of the vectorial parameters and the task duration as in Table 2 10. Verify the effect of the two modification requests through two Retrieve_collection_task_info.request, one for each task.
Expected Result	<ol style="list-style-type: none"> 4. The configurable Task Information Fields MUST be as those of the <i>Modify_collection_task.request</i> primitive. 5. The syntax and semantic of Information field MUST be as specified in Table 11/TR-198 [4] and R-63 to 67/ TR-198, especially as far as mandatorily supported values are concerned. 6. The Collection Tasks 2 MUST NOT be modified on the DCF and a <i>Modify_collection_task.confirm</i> message MUST be relayed on the DCF manager with following information: <ul style="list-style-type: none"> ▪ task_ID ▪ errorcode; the value of this parameter MUST specify “not executed because active” 7. The Collection Tasks 3 MUST be modified on the DCF and a <i>Modify_collection_task.confirm</i> message MUST be relayed on the DCF manager with following information: <ul style="list-style-type: none"> ▪ task_ID ▪ errorcode; the value of this parameter MUST be “success”

Table 1 - Changing parameters of Collection Task 2

Task Information Fields	Value
resource_list {parameter_list,collection_frequency,upload_frequency}	Line: 2 [scalar parameters,15min,15min] [framing parameters,15min,15min]
collection_filter	Line: 2 (xdsl2LineStatusXtuc = ‘noDefect’)
task_duration	24h
priority_request_flag (if supported)	-

Table 2 - Changing parameters of Collection Task 3

Task Information Fields	Value
resource_list {parameter_list,collection_frequency,upload_frequency}	[vectorial parameters,15min,15min]
collection_filter	Line: 1, 2 (xdsl2LineStatusXtuc = 'noDefect')
task_duration	2h
priority_request_flag (if supported)	-

5.1.3 Retrieve_collection_tasks test

Covered TR-198 [4] requirements: R-22, R-41.

Test Configuration	Refer to Figure 1 if the DCF is integrated in the NE or Figure 2 if not. Line 1 and 2 configured as per Section 4.3, points a) and b) respectively.
Test Procedure	1. Request via the DCF manager the information associated to Collection Task 2. 2. Request via the DCF manager the information associated to Collection Task 3.
Expected Result	1. For both Collection Task 2 and Collection Task 3, the following information MUST be presented: <ul style="list-style-type: none"> ▪ task_ID ▪ task_status ▪ task_name ▪ resource_list {parameter_list,collection_frequency, upload_frequency} ▪ collection_filter ▪ task_duration ▪ priority_request_flag ▪ errorcode <p>Note: the report of the errorcode is OPTIONAL in this case as no error is expected.</p>

5.1.4 Retrieve_all_collection_tasks test

Covered TR-198 [4] requirements: R-22, R-42

Test Configuration	Refer to Figure 1 if the DCF is integrated in the NE or Figure 2 if not. Line 1 and 2 configured as per Section 4.3, points a) and b) respectively.
Test Procedure	1. Request via the DCF manager the information associated to all collection tasks.
Expected Result	1. For all collection tasks, the following information MUST be presented: <ul style="list-style-type: none"> ▪ task_ID ▪ task_status ▪ errorcode <p>Note 1: as an alternative to the task_ID, the DCF manager MAY show the task_name.</p> <p>Note 2: the report of the errorcode is OPTIONAL in this case as no error is expected.</p>

5.1.5 Retrieve_all_active_collection_tasks

Covered TR-198 [4] requirements: R-22, R-43

Test Configuration	Refer to Figure 1 if the DCF is integrated in the NE or Figure 2 if not. Line 1 and 2 configured as per Section 4.3, points a) and b) respectively.
Test Procedure	1. Request via the DCF manager the information associated to all active collection tasks.
Expected Result	1. For all active collection tasks, the following information MUST be presented: <ul style="list-style-type: none"> ▪ task_ID ▪ errorcode <p>Note 1: as an alternative to the task_ID, the DCF manager MAY show the task_name.</p> <p>Note 2: the report of the errorcode is OPTIONAL in this case as no error is expected.</p>

5.2 Data Collection Tests

These tests aim to verify the correct upload of the collected data from the DCF to the DCF manager.

5.2.1 Start_collection_task test

Covered TR-198 [4] requirements: R-22, R-26 to 27, R-29 to 30

Test Configuration	Refer to Figure 1 if the DCF is integrated in the NE or Figure 2 if not. Line 1 and 2 configured as per Section 4.3, points a) and b) respectively.
Test Procedure	<ol style="list-style-type: none"> 1. Request via the DCF manager the start of the inactive Collection Tasks 2 and 3. 2. Request via the DCF manager the information associated to all collection tasks.
Expected Result	<ol style="list-style-type: none"> 1. Collection Task 2 and 3 will start data collection as configured and a <i>Start_collection_task.confirm</i> message MUST be relayed on the DCF manager with following information: <ul style="list-style-type: none"> ▪ task_ID ▪ errorcode <p>Note: the report of the errorcode is OPTIONAL in this case as no error is expected.</p> 2. As a result of step 2 Collection Tasks 2 and 3 MUST appear in the retrieved list of tasks with status equal to <i>active</i>.

The following test is only applicable to a DCF external, connected to multiple NEs. Covered TR-198 [4] requirements: R-22, R-26 to 28

Test Configuration	Refer to Figure 3 Line 1 and 2 configured as per Section 4.3, points a) and b) respectively.
Test Procedure	<ol style="list-style-type: none"> 2. Request via the DCF manager the start of the inactive Collection Task Multi_NE.
Expected Result	<ol style="list-style-type: none"> 1. Collection Task 2 and 3 are successfully started independently 2. Collection Task Multi_NE will start data collection as configured and a <i>Start_collection_task.confirm</i> message MUST be relayed on the DCF manager with following information: <ul style="list-style-type: none"> ▪ task_ID ▪ errorcode <p>Note: the report of the errorcode is OPTIONAL in this case as no error is expected.</p> 3. As a result of step 2 Collection Task Multi_NE MUST appear in the retrieved list of tasks with status equal to <i>active</i>.

5.2.2 Push_upload test

Covered TR-198 [4] requirements: R-22, R-31 to 34, R-48, R-53 to 55, R-62 to 68

Test Configuration	Refer to Figure 1 if the DCF is integrated in the NE or Figure 2 if not. Line 1 and 2 configured as per Section 4.3, points a) and b) respectively.
Test Procedure	<ol style="list-style-type: none"> 1. Wait at least one hour from the start of Collection Tasks 2 and 3, then request the DCF manager to show all the data reports, associated to Collection Tasks 2 and 3, already uploaded by the DCF 2. Verify on the DCF that the data reports are deleted after their upload, by checking in the system folder used for their storage or other system resources appropriate for such verification 3. Create a collection task named Collection Task 3_ADSL with the same parameters as Collection Task 3, but with Line 2 belonging to an ADSL linecard and configured as per Section 4.3, point c). Furthermore only parameters defined for ADSL shall be included in the parameters list. 4. Repeat steps 1 and 2 above. 5. Return to the original Collection Task 3 configuration, with Line 2 belonging to an ADSL2/2plus linecard.
Expected Result	<ol style="list-style-type: none"> 1. After each upload period and for each of the above tasks a <i>report_upload.indicate</i> message MUST be relayed on the DCF manager with following information: <ul style="list-style-type: none"> ▪ task_ID ▪ report ▪ errorcode <p>Note: the report of the errorcode is OPTIONAL in this case as no error is expected.</p> 2. All the already uploaded data reports MUST be readable from the DCF manager GUI and exportable in a machine readable file format 3. In either case the content of data reports MUST conform to R-31 to 333, R-48, and R-62 to 68 of TR-198 [4] 4. The first collected data report MUST conform to R-34 of TR-198 [4] 5. As related to the check in step 2, the DCF MAY delete the uploaded data reports as per R-55 of TR-198

5.2.3 Pull-upload test

Covered TR-198 [4] requirements: R-22, R-31, R-48 to 452, R-62 to 68, R-81

Test Configuration	Refer to Figure 1 if the DCF is integrated in the NE or Figure 2 if not. Line 1 and 2 configured as per Section 4.3, points a) and b) respectively.
Test Procedure	<ol style="list-style-type: none"> 1. Wait at least one hour from the start of Collection Tasks 2 and 3, then issue a <i>report_upload.request</i> (pull-upload) via the DCF manager the upload of collected data, associated to Collection Tasks 2 and 3. 2. Verify on the DCF <u>if</u> data reports are deleted after their upload, by checking in the system folder used for their storage or other system resources appropriate for such verification
Expected Result	<ol style="list-style-type: none"> 1. For each of the above tasks a <i>Report_upload.confirm</i> message MUST be uploaded by the DCF to the DCF manager with following information: <ul style="list-style-type: none"> ▪ task_ID ▪ report ▪ errorcode <p>Note: the report of the errorcode is OPTIONAL in this case as no error is expected.</p> 2. The data reports MUST be readable from the DCF manager GUI and exportable in a machine readable file format 3. In either case the content of data reports MUST conform to R-31 to 33, R-48, and R-62 to 68 of TR-198 [4]. 4. As per the definition of pull-upload, the data reports MUST only contain the data pertaining to the period between the end of last upload period and the time when the <i>report_upload.request</i> was issued. 5. [Optional] As related to the check in step 2, the DCF MUST NOT delete the uploaded data reports. Note: this behavior is OPTIONAL as the related requirement is not yet defined in TR-198 [4].

5.2.4 Collection_filter test

Covered TR-198 [4] requirements: R-22

Test Configuration	Refer to Figure 1 if the DCF is integrated in the NE or Figure 2 if not. Line 1 and 2 configured as per Section 4.3, points a) and b) respectively.
Test Procedure	<ol style="list-style-type: none">1. Wait at least one hour from the start of Collection Task 3.2. Immediately before the current upload period expires disconnect Line 2.3. Wait until next upload period expires then request the DCF manager to show the data reports, associated to Collection Task 3 and pertaining to that upload period.
Expected Result	<ol style="list-style-type: none">1. The data reports MUST contain the parameters collected from Line 1 and MUST NOT contain any record or show an empty record related to Line 2.

5.2.5 Report_delete test

Covered TR-198 [4] requirements: R-22, R-56 to 57

Test Configuration	Refer to Figure 1 if the DCF is integrated in the NE or Figure 2 if not. Line 1 and 2 configured as per Section 4.3, points a) and b) respectively.
Test Procedure	<ol style="list-style-type: none"> 1. When the clock time is hh:35, request via the DCF manager that the reports associated to Collection Task 3 be deleted. 2. Verify on the DCF if data reports are deleted, by checking in the system folder used for their storage or other system resources appropriate for such verification 3. Request via the DCF manager the information associated to Collection Task 3. 4. Wait until the current upload period expires (i.e. 1h for vectorial parameters and 15min for all other parameter groups) plus the time needed for the upload, then verify which data reports have been uploaded by the DCF
Expected Result	<ol style="list-style-type: none"> 1. A <i>Report_delete.confirm</i> message MUST be relayed on the DCF manager with following information: <ul style="list-style-type: none"> ▪ task_ID ▪ errorcode <p>Note: the report of the errorcode is OPTIONAL in this case as no error is expected.</p> 2. The data reports associated to Collection Task 3 MUST be deleted on the DCF, regardless of them having been already uploaded or not. 3. Collection Task 3 status MUST still be <i>active</i> 4. Among the data reports uploaded after the current upload period, only those of vectorial parameters MUST be missing for the first and second quarter of the last 1h upload period. Data related to all the other parameters groups MUST be available for all periods, with the exception for the third quarter of the last 1h upload period for which the report MAY also be absent or incomplete.

5.2.6 Data validity test

This test aims to verify the correctness of the data collection comparing the data collected by DCF and the data collected directly on the NE by other ways such as command line or EM interfaces.

Covered TR-198 [4] requirements: R-48, R-68

Test Configuration	Refer to Figure 1 if the DCF is integrated in the NE or Figure 2 if not. Line 1 and 2 configured as per Section 4.3, points a) and b) respectively.
Test Procedure	<ol style="list-style-type: none"> 1. Via Element Manager (or CLI) GUI, retrieve Line 1 and 2 parameters that are configured for collection in Collection Tasks 2 and 3, at the end of the collection period. 2. Wait until current upload period expires then request the DCF manager to show the data reports, associated to Collection Tasks 2 and 3 and pertaining to that upload period. 3. Create a collection task named Collection Task 3_ADSL with the same parameters as Collection Task 3, but with Line 2 belonging to an ADSL linecard and configured as per Section 4.3, point c). Furthermore only parameters defined for ADSL MUST be included in the parameters list. 4. Repeat steps 1 and 2 above.
Expected Result	<ol style="list-style-type: none"> 1. Data collected via Collection Tasks 2 and 3 and those gathered via the EM (or CLI) GUI and corresponding to the same parameter and period MUST have: <ul style="list-style-type: none"> ▪ the same value for those parameters static/quasi-static in nature (e.g. bitrate, INP) ▪ resembling values for those parameters subject to updates during showtime (e.g. NM, Hlog)

5.2.7 Stop_collection_task test

Covered TR-198 [4] requirements: R-22, R-36 to 37

Test Configuration	Refer to Figure 1 if the DCF is integrated in the NE or Figure 2 if not. Line 1 and 2 configured as per Section 4.3, points a) and b) respectively.
Test Procedure	<ol style="list-style-type: none"> 1. Request the DCF, via the DCF manager, to stop the active Collection Tasks 2 and 3. 2. Request the DCF, via the DCF manager, the information associated to all collection tasks.
Expected Result	<ol style="list-style-type: none"> 1. Collection Task 2 and 3 will stop data collection without deleting collected data. 2. A <i>Stop_collection_task.confirm</i> message MUST be relayed on the DCF manager with following information: <ul style="list-style-type: none"> ▪ task_ID ▪ errorcode <p>Note: the report of the errorcode is OPTIONAL in this case as no error is expected.</p> 3. As a result of step 2 Collection Task 3 MUST appear in the retrieved list of tasks with status equal to <i>inactive</i>.

The following test is only applicable to a DCF external, connected to multiple NEs.

Covered TR-198 [4] requirements: R-22, R-36 to 40

Test Configuration	Refer to Figure 3 Line 1 and 2 configured as per Section 4.3, points a) and b) respectively.
Test Procedure	<ol style="list-style-type: none"> 1. Request the DCF, via the DCF manager, to stop the active Collection Task Multi_NE.
Expected Result	<ol style="list-style-type: none"> 1. Collection Task Multi_NE will stop data collection without deleting collected data. 2. A <i>Stop_collection_task.confirm</i> message MUST be relayed on the DCF manager with following information: <ul style="list-style-type: none"> ▪ task_ID ▪ errorcode <p>Note: the report of the errorcode is OPTIONAL in this case as no error is expected.</p> 3. As a result of step 2 Collection Task Multi_NE MUST appear in the retrieved list of tasks with status equal to <i>inactive</i>.

5.2.8 Task duration test

Covered TR-198 [4] requirements: R-22, R-82 to R84

Test Configuration	Refer to Figure 1 if the DCF is integrated in the NE or Figure 2 if not. Line 1 and 2 configured as per Section 4.3, points a) and b) respectively.
Test Procedure	<ol style="list-style-type: none"> 1. Wait until the duration periods of Collection Task 2 expire. 2. Request via the DCF manager the information associated to all collection tasks.
Expected Result	<ol style="list-style-type: none"> 1. In the collection task list Collection Tasks 2 MUST appear in the list of tasks as <i>completed</i>.

5.2.9 Delete_collection_task test

Covered TR-198 [4] requirements: R-22, R-44 to 46

Test Configuration	Refer to Figure 1 if the DCF is integrated in the NE or Figure 2 if not. Line 1 and 2 configured as per Section 4.3, points a) and b) respectively.
Test Procedure	<ol style="list-style-type: none"> 1. Delete on the DCF, via the DCF manager, Collection Task 3. 2. Request via the DCF manager the information associated to all collection tasks. 3. Request the DCF manager to show all the data reports, associated to Collection Task 2, already uploaded by the DCF
Expected Result	<ol style="list-style-type: none"> 1. Collection Task 3 MUST be deleted and a <i>Delete_collection_task.confirm</i> message MUST be relayed on the DCF manager with following information: <ul style="list-style-type: none"> ▪ task_ID ▪ errorcode <p>Note: the report of the errorcode is OPTIONAL in this case as no error is expected.</p> 2. As a result of step 2 Collection Task 3 MUST NOT appear in the retrieved list of tasks. 3. As a result of step 3 the data reports uploaded before the deletion of Collection Task 3 MUST still be available.

6 DCF Southbound interface tests

The DCF Southbound interface tests aim to verify that the DQM-ME is able to provide the required data as defined in TR-198 to the DCF over the A and B interfaces of the DQM System Functional Model, which coincide with the DCF Southbound interface. These tests, and related test configurations, are applicable only if the DCF is not implemented in the DQM-ME.

Generally speaking, while the parameters, sent over the DCF Southbound interface, are standardized in ITU-T Recommendations G.997.1, G.996.2 [6], and other standards, the protocol used for the management interface on a particular DQM-ME is not. Thus the communication protocol between the DCF and the DQM-ME uses the management interface native to that particular DQM-ME.

The DCF Southbound interface can be indirectly tested via the tests defined at the Northbound interface, in that if a test performed at the Northbound interface passes it can be concluded that the Southbound interface functionalities and performances are implemented correctly in both directions (DCF \Leftrightarrow DQM-ME). Even if the Northbound interface is not directly accessible from outside the SUT, because the DCF is integrated with the DCF manager (as discussed in section 4.1 and depicted in Figure 5), the tests on the Southbound interface implement the same testing details as defined at the Northbound interface. In this case the DCF can be configured to execute the data collection tasks via means other than the Northbound interface, by using a GUI, scripts or other means, depending on the implementation. Hence the tests specified at the Northbound interface remain generally applicable even if the Northbound interface itself cannot be accessed.

If a test defined for the Northbound interface passes, then it is concluded that the corresponding test defined for the Southbound interface passes. However, if the Northbound interface test failed, then the analysis is to be deepened by performing the corresponding Southbound interface test defined in this section.

If a test performed at the Northbound interface failed, an inconclusive result should be drawn about this being caused by an incorrect implementation of the bi-directional Southbound interface or of the DCF Northbound interface itself. In such inconclusive cases it is necessary to refine the tests at the Southbound interface to discriminate DCF implementation failures from Southbound interface failures. To facilitate this refinement, and to test the Southbound interface, a Protocol Analyser is introduced at the Southbound interface in a transparent mode that does not interfere with the communication (see Figure 4 and Figure 5). The Protocol Analyser captures data in both directions between the DCF and the DQM-ME.

Some tests for the Northbound interface do not apply at the Southbound interface. So these tests are omitted from this Section, although they remain in Section 5 and comprise necessary tests for the Northbound interface.

These tests are:

- Task Configuration and Management tests
- Start collection task test
- Pull upload test

- Collection filter test
- Report delete test
- Delete collection task test

6.1 Data Collection Tests

These tests aim to verify the correct upload of collected data (See 4.1). To proceed with the Data Collection tests it is a prerequisite that Collection Task 2 and 3 are configured at the DCF as described in section 5.1.1. In the case that the Northbound interface is not accessible, an equivalent configuration of the DCF shall be carried out.

6.1.1 Push_upload test

If the Northbound interface performance test as described in Section 5.2.2 has passed, the correct performance at both the Northbound and Southbound interfaces is declared. If the Northbound test failed, or was not conducted, the Southbound interface Push_upload test procedure below is performed.

The test configuration shown in Figure 4 is used if the Northbound interface is externally accessible, or the test configuration shown in Figure 5 if not.

It is a prerequisite that Collection Task 2 and 3 are configured at the DCF as described in section 5.1.1. In the case that the Northbound interface is not accessible, an equivalent configuration of the DCF shall be carried out.

Test Configuration	Refer to Figure 4 if the NB interface is externally accessible or Figure 5 if not. The Protocol Analyser is configured to capture the packets flowing between the DCF and the DQM-ME and vice-versa.
Test Procedure	<ol style="list-style-type: none"> 1. Wait until at least 15 min have passed since the start of Collection Tasks 2 and 3, then verify on the Protocol Analyser if: <ul style="list-style-type: none"> – the DCF sends command packets to the DQM-ME to retrieve the parameters configured in the Collection Tasks. – the DQM-ME sends data packets to the DCF containing the parameters configured in the Collection Tasks. 2. Modify Collection Task 3, so that Line 2 belongs to an ADSL1 linecard and is configured as per section 4.3, point c). Furthermore only parameters defined for ADSL1 shall be included in the parameters list. 3. Repeat step 2 above. 4. Return to the original Collection Task 3 configuration, with Line 2 belonging to an ADSL2/2+ linecard.
Expected Result	<ol style="list-style-type: none"> 1. During each upload period and for each of the above tasks: <ul style="list-style-type: none"> – the DCF MUST send one or more command packets to retrieve the configured parameters from the DQM-ME. – all the configured parameters MUST be sent in response from the DQM-ME to the DCF.

6.1.2 Data validity test

This test aims to verify the correctness of the data collection comparing the data collected by DCF and the data collected directly on the NE by other ways such as command line or EM interfaces.

If the Northbound interface performance test as described in Section 5.2.6 has passed, the correct performance at both the Northbound and Southbound interfaces is declared. If the Northbound test failed, or was not conducted, the Southbound interface data validity test procedure below is performed.

The test configuration shown in Figure 4 is used if the Northbound interface is externally accessible, or the test configuration shown in Figure 5 if not.

It is a prerequisite that Collection Task 2 and 3 are configured at the DCF as described in section 5.1.1. In the case that the Northbound interface is not accessible, an equivalent configuration of the DCF is carried out.

Test Configuration	Refer to Figure 4 if the NB interface is externally accessible or Figure 5 if not. The Protocol Analyser is configured to capture the packets flowing between the DCF and the DQM-ME and vice-versa.
Test Procedure	<ol style="list-style-type: none"> 1. Via Element Manager GUI (or CLI), retrieve Line 1 and 2 parameters that are configured for collection in Collection Tasks 2 and 3. 2. Wait until current upload period expires then request the DCF to show the collected data, associated to Collection Tasks 2 and 3 and pertaining to that upload period. 3. Via the Protocol Analyser, capture all the data packets sent from the DQM-ME to the DCF . 4. Modify Collection Task 3, so that Line 2 belongs to an ADSL1 linecard and is configured as per section 4.3, point c). Furthermore only parameters defined for ADSL1 shall be included in the parameters list. 5. Repeat steps 1, 2 and 3 above. 6. Return to the original Collection Task 3 configuration, with Line 2 belonging to an ADSL2/2+ linecard.
Expected Result	<ol style="list-style-type: none"> 1. Data collected on the DCF, on the Protocol Analyser and on the EM GUI (or CLI), and corresponding to the same parameter and period MUST have: <ul style="list-style-type: none"> ▪ the same value for those parameters static/quasi-static in nature (e.g. bitrate, INP) ▪ resembling values for those parameters subject to updates during showtime (e.g. NM, Hlog).

6.1.1 Stop collection task test

This test aims to verify that upon stopping of a collection task by the DCF the related Southbound interface traffic ceases.

The test configuration shown in Figure 4 is used if the Northbound interface is externally accessible, or the test configuration shown in Figure 5 if not.

It is a prerequisite that Collection Task 2 and 3 are configured at the DCF as described in section 5.1.1. In the case that the Northbound interface is not accessible, an equivalent configuration of the DCF is carried out.

Covered requirement: R-39

Test Configuration	Refer to Figure 4 if the NB interface is externally accessible or Figure 5 if not. The Protocol Analyser is configured to capture the packets flowing between the DCF and the DQM-ME and vice-versa.
Test Procedure	<ol style="list-style-type: none"> 1. Stop Collection Task 2, while Collection Task 3 MUST keep running. 2. Wait until the current collection period (as configured for the specific parameter groups) pass, then capture with the Protocol Analyser: <ul style="list-style-type: none"> – the command packets sent by the DCF to the DQM-ME to retrieve the parameters configured in the Collection Tasks. – the data packets sent by the DQM-ME to the DCF containing the parameters configured in the Collection Tasks.
Expected Result	<ol style="list-style-type: none"> 1. Data collected on the Protocol Analyser MUST show that: <ul style="list-style-type: none"> ▪ the DCF sends only command packets related to Collection Tasks 3. ▪ only parameters related to Collection Tasks 3 are sent in response from the DQM-ME to the DCF.

6.1.2 Task duration test

This test aims to verify that upon expiry of a collection task the related Southbound interface traffic ceases.

The test configuration shown in Figure 4 is used if the Northbound interface is externally accessible, or the test configuration shown in Figure 5 if not.

It is a prerequisite that Collection Task 2 and 3 are configured at the DCF as described in section 5.1.1. In the case that the Northbound interface is not accessible, an equivalent configuration of the DCF is carried out.

Covered requirement : R-58

Test Configuration	Refer to Figure 4 if the NB interface is externally accessible or Figure 5 if not. The Protocol Analyser is configured to capture the packets flowing between the DCF and the DQM-ME and vice-versa.
Test Procedure	<ol style="list-style-type: none"> 1. Wait until the 6-hour duration of Collection Task 2 (while it is assumed Collection Task 3 is still running) expires, then capture with the Protocol Analyser: <ul style="list-style-type: none"> – the command packets sent by the DCF to the DQM-ME to retrieve the parameters configured in the Collection Tasks. – the data packets sent by the DQM-ME to the DCF containing the parameters configured in the Collection Tasks.
Expected Result	<ol style="list-style-type: none"> 1. Data collected on the Protocol Analyser MUST show that: <ul style="list-style-type: none"> ▪ the DCF sends only command packets related to Collection Tasks 3. ▪ only parameters related to Collection Tasks 3 are sent in response from the DQM-ME to the DCF.

7 DCF performance tests

These tests aim to verify that the DCF fulfils the performance requirements specified in TR-198 [4].

This means to verify that the DCF's aggregate processing/memory/data-transfer capabilities are supporting the minimum conventional load associated to a reference combined collection task as specified in Section 6.5/ TR-198.

7.1 Performance tests under reference combined use case

Covered TR-198 [4] requirements: R-73

Test Configuration	<p>Refer to Figure 6 if the DCF is integrated in the NE or Figure 7 if not.</p> <p>Lines belonging to VDSL2 linecards configured as per Section 4.3, point a).</p> <p>Lines belonging to ADSL2/2plus linecards as per Section 4.3, point b).</p> <p>As explained in Section 4.2, to avoid the use of huge number of CPEs, the lines MUST be configured in way that is proved to generate the same data collection load as if the line itself was terminated with a CPE and in showtime.</p> <p>Section 4.2 suggests three possible ways for doing that:</p> <ul style="list-style-type: none"> ▪ putting the line in “showtime freeze” (aka “continuously sending”) ▪ “freezing” the MIB content of the line once it has reached showtime ▪ creating the associated instance in the NE’s MIB tree with all parameters collectable; in this case the Collection Tasks MUST have the “collection filter” off.
Test Procedure	<ol style="list-style-type: none"> 1. Create Collection Task Ref_Perf_BckGnd_Task_TR-198 on the DCF via the DCF manager. 2. Let N be the number representing 10% of the total number of the lines supported by the NE. 3. Create N tasks of the type of Collection Task Ref_Perf_Task-k_TR-198 on the DCF via the DCF manager. 4. Activate Collection Task Ref_Perf_BckGnd_Task_TR-198 and the N tasks created in step 2. 5. Wait until a number of collection and upload periods (as configured for the specific parameter groups) pass, then request the DCF manager to show all the data reports, associated to all the collection tasks activated in step 4. 6. Wait until the duration periods of all the collection tasks activated in step 4 expire, then request the DCF manager to show all the data reports, associated to all of those tasks.
Expected Result	<ol style="list-style-type: none"> 1. The DCF MUST be able to collect and upload all the requested parameters for each configured collection period throughout the duration of each of the involved tasks. 2. All the data reports generated by the configured collection/upload scheduling MUST be available on the DCF manager and contain all the parameters configured for collection.

The following test is only applicable to a DCF external, connected to multiple NEs.

Covered TR-198 [4] requirements: R-22, R-73

Test Configuration	<p>Refer to Figure 8.</p> <p>Lines belonging to VDSL2 linecards configured as per Section 4.3, point a). Lines belonging to ADSL2/2plus linecards as per Section 4.3, point b). As explained in Section 4.2, to avoid the use of huge number of CPEs, the lines MUST be configured in way that is proved to generate the same data collection load as if the line itself was terminated with a CPE and in showtime.</p> <p>Section 4.2 suggests three possible ways for doing that:</p> <ul style="list-style-type: none"> ▪ putting the line in “showtime freeze” (aka “continuously sending”) ▪ “freezing” the MIB content of the line once it has reached showtime ▪ creating the associated instance in the NE’s MIB tree with all parameters collectable; in this case the Collection Tasks MUST have the “collection filter” off.
Test Procedure	<ol style="list-style-type: none"> 7. Create Collection Task Ref_Perf_BckGnd_Task_TR-198_Multi_NE on the DCF via the DCF manager. 8. Collection Task Ref_Perf_BckGnd_Task_TR-198_Multi_NE is the same as Collection Task Ref_Perf_BckGnd_Task_TR-198 but it is applied on NE_1 and NE_2. 9. Let N be the number representing 10% of the total number of the lines supported by the NE_1 and NE_2, assumed to be of the same equipment type. 10. Create N tasks of Collection Task Ref_Perf_Task-k_TR-198_Multi_NE on the DCF via the DCF manager. 11. Collection Task Ref_Perf_Task-k_TR-198_Multi_NE is the same as Collection Task Ref_Perf_Task-k_TR-198 but it is applied on NE_1 and NE_2. 12. Activate Collection Task Ref_Perf_BckGnd_Task_TR-198 and the N tasks created in step 2. 13. Wait until a number of collection and upload periods (as configured for the specific parameter groups) pass, then request the DCF manager to show all the data reports, associated to all the collection tasks activated in step 4. 14. Wait until the duration periods of all the collection tasks activated in step 4 expire, then request the DCF manager to show all the data reports, associated to all of those tasks.
Expected Result	<ol style="list-style-type: none"> 1. The DCF MUST be able to collect and upload all the requested parameters for each configured collection period throughout the duration of each of the involved tasks. 2. All the data reports generated by the configured collection/upload scheduling MUST be available on the DCF manager and contain all the parameters configured for collection.

8 DCF load stress tests [Optional]

These tests aim to verify that the DCF fulfills the maximum limits for collection and upload, as declared by the manufacturer. The following tests deal with limits on the number of collected parameters on a single line, the number of concurrent lines under collection, the number of active CollectionTasks.

The reference collection tasks for these tests are defined in 4.4.3.

8.1 Max parameter for every line in a collection task test [Optional]

Test configuration	<p>Refer to Figure 6 if the DCF is integrated in the NE or Figure 7 if not. Lines belonging to VDSL2 linecards configured as per Section 4.3, point a). Lines belonging to ADSL2/2plus linecards as per Section 4.3, point b). Refer to Section 4.2 on how to avoid the use of huge number of CPEs to configure the needed lines.</p>
Test procedure	<ol style="list-style-type: none"> 1. Create the Max_Params_Single_Line task on the DCF via the DCF manager. 2. Start the Max_Params_Single_Line task. 3. Wait until a number of collection and upload periods (as configured for the specific parameter groups) pass, then request the DCF manager to show all the data reports, associated to the collection task activated in step 2. 4. Wait until the duration period of the collection task activated in step 2 expires, then request the DCF manager to show all the data reports, associated to this task.
Expected result	<ol style="list-style-type: none"> 3. The DCF MUST be able to collect and upload all the requested parameters for each configured collection period throughout the duration of the involved task. 4. All the data reports generated by the configured collection/upload scheduling MUST be available on the DCF manager and contain all the parameters configured for collection.

8.2 Max lines per board collection task test [Optional]

Test configuration	<p>Refer to Figure 6 if the DCF is integrated in the NE or Figure 7 if not. Lines belonging to VDSL2 linecards configured as per Section 4.3, point a). Lines belonging to ADSL2/2plus linecards as per Section 4.3, point b). Refer to Section 4.2 on how to avoid the use of huge number of CPEs to configure the needed lines.</p>
---------------------------	--

Test procedure	<ol style="list-style-type: none"> 1. Create the Max_Lines_Per_Linecard task on the DCF via the DCF manager. 2. Start the Max_Lines_Per_Linecard task. 3. Wait until a number of collection and upload periods (as configured for the specific parameter groups) pass, then request the DCF manager to show all the data reports, associated to the collection task activated in step 2. 4. Wait until the duration period of the collection task activated in step 2 expires, then request the DCF manager to show all the data reports, associated to this task.
Expected result	<ol style="list-style-type: none"> 1. The DCF MUST be able to collect and upload all the requested parameters for each configured collection period throughout the duration of the involved task. 2. All the data reports generated by the configured collection/upload scheduling MUST be available on the DCF manager and contain all the parameters configured for collection.

8.3 Max lines for collection task test [Optional]

Test configuration	<p>Refer to Figure 6 if the DCF is integrated in the NE or Figure 7 if not. Lines belonging to VDSL2 linecards configured as per Section 4.3, point a). Lines belonging to ADSL2/2plus linecards as per Section 4.3, point b). Refer to Section 4.2 on how to avoid the use of huge number of CPEs to configure the needed lines.</p>
Test procedure	<ol style="list-style-type: none"> 1. Create the Max_Lines_Per_NE task on the DCF via the DCF manager. 2. Start the Max_Lines_Per_NE task. 3. Wait until a number of collection and upload periods (as configured for the specific parameter groups) pass, then request the DCF manager to show all the data reports, associated to the collection task activated in step 2. 4. Wait until the duration period of the collection task activated in step 2 expires, then request the DCF manager to show all the data reports, associated to this task.
Expected result	<ol style="list-style-type: none"> 1. The DCF MUST be able to collect and upload all the requested parameters for each configured collection period throughout the duration of the involved task. 2. All the data reports generated by the configured collection/upload scheduling MUST be available on the DCF manager and contain all the parameters configured for collection.

9 DCF Southbound interface load stress tests [Optional]

These tests aim to verify that the DCF and the DQM-ME fulfill the maximum limits for collection and upload, as declared by the manufacturer. The following tests deal with limits on the number of collected parameters on a single line, the number of concurrent lines under collection, and the number of active collection tasks.

The reference collection tasks for these tests are defined in 4.4.3.

These tests are beyond the actual verification of TR-198 [4] compliance and are included only as an aid to correctly test the DCF implementation. The compliance to these tests is OPTIONAL for the SUT.

9.1 Southbound interface max parameter for every line in a collection task test [Optional]

If the Northbound interface performance test as described in Section 8.1 has passed, declare that the related collection load is fulfilled at both the Northbound and Southbound interfaces. If the Northbound test failed or was not conducted, the Southbound interface max parameter for every line test procedure below is performed.

To proceed with the load stress tests it is a prerequisite that Collection Task Max_Params_Single_Line is configured at the DCF as described in Section 5.1.1. In the case the Northbound interface is not accessible, an equivalent configuration of the DCF shall be carried out.

The test configuration shown in Figure 4 is used if the Northbound interface is externally accessible, or the test configuration shown in Figure 5 if not.

Test Configuration	Refer to Figure 4 if the NB interface is externally accessible or Figure 5 if not. The Protocol Analyser is configured to capture the packets flowing between the DCF and the DQM-ME and vice-versa.
Test procedure	<ol style="list-style-type: none"> 1. Create on the DCF a Collection Task named Max_Params_Single_Line. 2. Activate the Max_Params_Single_Line task 3. Wait until a number of collection periods (as configured for the specific parameter groups) pass, then capture with the Protocol Analyser: <ul style="list-style-type: none"> – the command packets sent by the DCF to the DQM-ME to retrieve the parameters configured in the Collection Task. – the data packets sent by the DQM-ME to the DCF containing the parameters configured in the Collection Task. 4. Wait until the duration period of the collection task activated in step 2 expires.

Expected result	<ol style="list-style-type: none"> 1. The DCF MUST send to the DQM-ME all the parameters requests for as configured in each collection period throughout the duration of the involved task. 2. The DQM-ME MUST send to the DCF all data packets in response to all the parameters requests received from the DCF.
------------------------	---

9.2 Southbound interface max lines per board collection task test [Optional]

If the Northbound interface performance test as described in Section 8.2 has passed, declare that the related collection load is fulfilled at both the Northbound and Southbound interfaces. If the Northbound test failed, or was not conducted, the Southbound interface max lines per board test procedure below is performed.

To proceed with the load stress tests it is a prerequisite that Collection Task `Max_Lines_Per_Linecard` is configured at the DCF as described in section 5.1.1. In the case the Northbound interface is not accessible, an equivalent configuration of the DCF shall be carried out.

The test configuration shown in Figure 4 is used if the Northbound interface is externally accessible, or the test configuration shown in Figure 5 if not.

Test configuration	<p>Refer to Figure 4 if the NB interface is externally accessible or Figure 5 if not.</p> <p>The Protocol Analyser is configured to capture the packets flowing between the DCF and the DQM-ME and vice-versa.</p>
Test procedure	<ol style="list-style-type: none"> 1. Create on the DCF a Collection Task named <code>Max_Lines_Per_Linecard</code>. 2. Activate the <code>Max_Lines_Per_Linecard</code> task. 3. Wait until a number of collection and upload periods (as configured for the specific parameter groups) pass, then capture with the Protocol Analyser: <ul style="list-style-type: none"> – the command packets sent by the DCF to the DQM-ME to retrieve the parameters configured in the Collection Task. – the data packets sent by the DQM-ME to the DCF containing the parameters configured in the Collection Task. 4. Wait until the duration period of the collection task activated in step 2 expires.
Expected result	<ol style="list-style-type: none"> 1. The DCF MUST send to the DQM-ME all the parameters requests for as configured in each collection period throughout the duration of the involved task. 2. The DQM-ME MUST send to the DCF all data packets in response to all the parameters requests received from the DCF.

9.3 Southbound interface max lines for collection task test [Optional]

If the Northbound interface performance test as described in Section 8.3 has passed, declare that the related collection load is fulfilled at both the Northbound and Southbound interfaces. If the Northbound test failed or was not conducted, perform the Southbound interface max lines test procedure below.

To proceed with the load stress tests it is a prerequisite that Collection Task Max_Lines_Per_NE is configured at the DCF as described in section 5.1.1. In the case the Northbound interface is not accessible, an equivalent configuration of the DCF shall be carried out.

The test configuration shown in Figure 4 is used if the Northbound interface is externally accessible, or the test configuration shown in Figure 5 if not.

Test configuration	Refer to Figure 4 if the NB interface is externally accessible or Figure 5 if not. The Protocol Analyser is configured to capture the packets flowing between the DCF and the DQM-ME and vice-versa.
Test procedure	<ol style="list-style-type: none"> 1. Create on the DCF a Collection Task named Max_Lines_Per_NE. 2. Activate the Max_Lines_Per_NE task. 3. Wait until a number of collection periods (as configured for the specific parameter groups) pass, then capture with the Protocol Analyser: <ul style="list-style-type: none"> – the command packets sent by the DCF to the DQM-ME to retrieve the parameters configured in the Collection Task. – the data packets sent by the DQM-ME to the DCF containing the parameters configured in the Collection Task. 4. Wait until the duration period of the collection task activated in step 2 expires.
Expected result	<ol style="list-style-type: none"> 1. The DCF MUST send to the DQM-ME all the parameters requests for as configured in each collection period throughout the duration of the involved task. 2. The DQM-ME MUST send to the DCF all data packets in response to all the parameters requests received from the DCF.

End of Broadband Forum Technical Report TR-260